


## Description

The CSHxxBBL series are designed to protect voltage sensitive components which are connected to data and transmission lines from overvoltage caused by ESD (electrostatic discharge), CDE (Cable Discharge Events), and EFT (electrical fast transients). Excellent clamping capability, low leakage, and fast response time, make these parts ideal for ESD protection on designs where board space is at a premium.

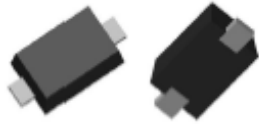

## Mechanical Characteristics

- ◆ SOD523
- ◆ ROHS/ Compliant
- ◆ Halogen free
- ◆ Molding compound flammability rating: UL 94V-0
- ◆ Marking: Part number
- ◆ Packing: Tape and Reel per EIA 481



## Features

- ◆ IEC 61000-4-2 (ESD)
  - ±30kV Contact Discharge
  - ±30kV Air Discharge
- ◆ 90W Peak pulse Power(8/20us)
- ◆ IEC 61000-4-4 EFT Protection
  - 40A (5/50ns)
- ◆ Halogen free and RoHS compliant
- ◆ Protects one directional I/O line
- ◆ Transient protection for high-speed data lines
- ◆ Low clamping voltage
- ◆ Low leakage current

## Applications

- ◆ Cell Phone Handsets and Accessories
- ◆ Microprocessor based equipment
- ◆ Personal Digital Assistants
- ◆ Notebooks / Desktops / Servers
- ◆ Portable Instrumentation
- ◆ Peripherals & Pagers

### Dimensions and Pin Configuration

Pin	Name	Description	Outline	Circuit Diagram
1	IO1	Connect to IO		
2	IO2	Connect to IO		

### Ordering Information

Part Number	Package	Material	Packing	Quantity per reel	Flammability Rating	Reel Size
CSHxxBBL	SOD523	Halogen free	Tape & Reel	3,000 PCS	UL 94V-0	7 inches
Marking for the CSHxxBB L series						
V <sub>RWM</sub>	3.3V	5V	8V	12V	-	-
Marking	CT	DT	8C	12C	-	-

### Absolute Maximum Ratings (T<sub>A</sub>=25°C unless otherwise specified)

Parameters	Symbol	Min.	Max.	Unit
ESD (IEC61000-4-2 air discharge) @25°C	V <sub>ESD</sub>	-	±30	kV
ESD (IEC61000-4-2 contact discharge) @25°C	V <sub>ESD</sub>	-	±30	kV
Junction temperature	T <sub>J</sub>	-	125	°C
Operating temperature	T <sub>OP</sub>	-40	125	°C
Storage temperature	T <sub>STG</sub>	-55	150	°C
Lead temperature	T <sub>L</sub>	-	260	°C

Electrical Characteristics ( $T_A=25^{\circ}\text{C}$  unless otherwise specified)

Part Number	VRWM (max.)	VBR (min.)	VCL@I=1A (max.)	IPP (max.)	VCL@I=IPP (max.)	IR (max.)	CJ (typ.)
	(V)	(V)	(V)	(A)	(V)	( $\mu\text{A}$ )	(pF)
CSH03BBL	3.3	3.6	7	10	9	1.0	15
CSH05BBL	5.0	5.6	8.5	9	10	1.0	15
CSH08BBL	8.0	9.0	11	8	17	1.0	10
CSH12BBL	12.0	13.0	14	6	20	1.0	10

Typical Performance Characteristics ( $T_A=25^{\circ}\text{C}$  unless otherwise Specified)

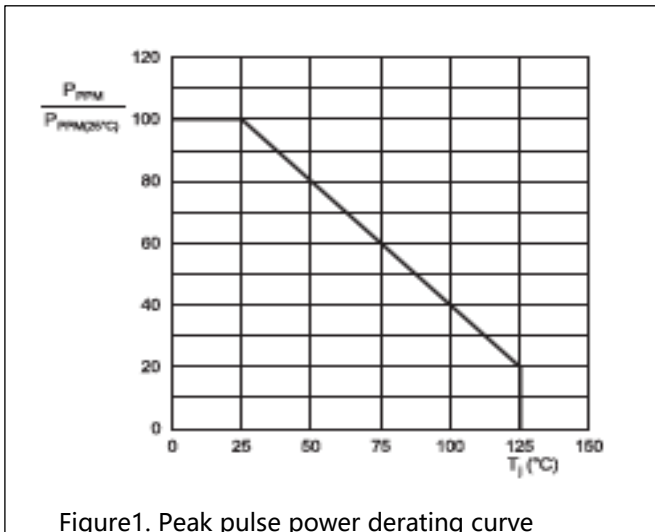


Figure1. Peak pulse power derating curve

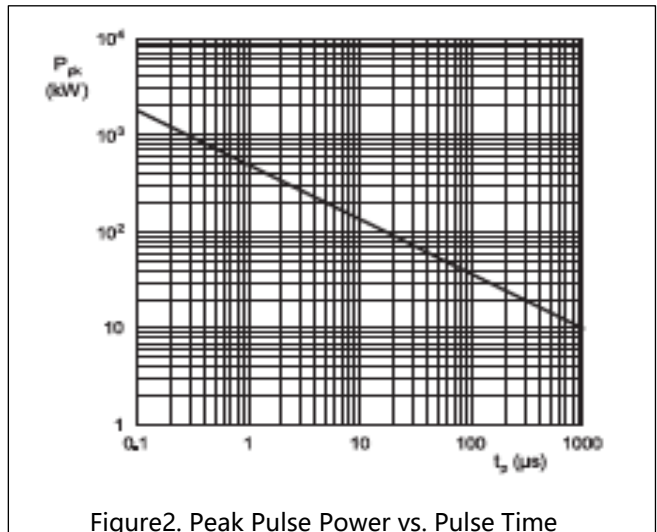


Figure2. Peak Pulse Power vs. Pulse Time


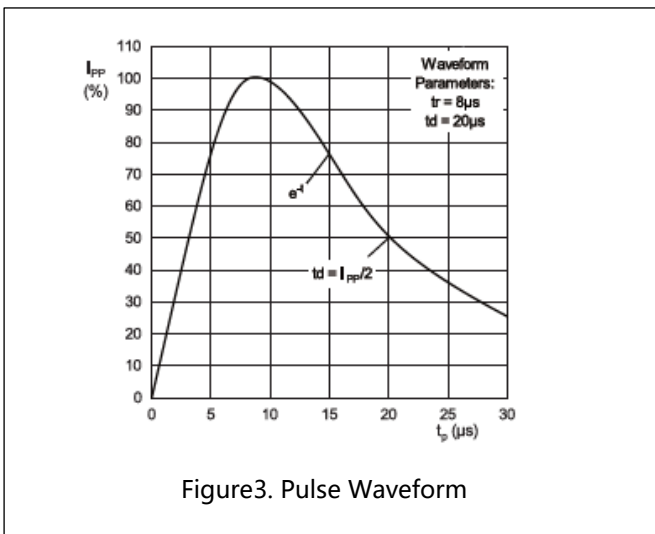



Figure3. Pulse Waveform

Applications Information

Typical Interface Application

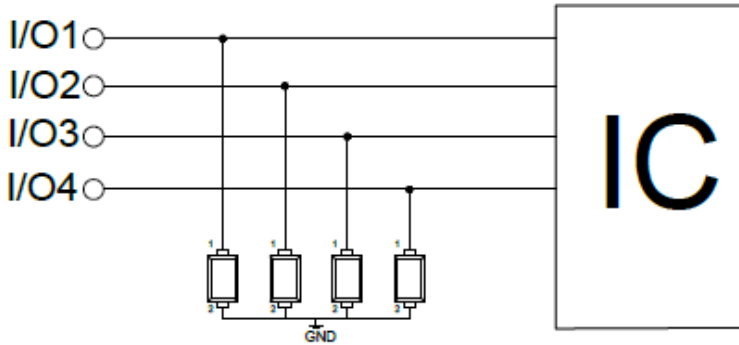


Package Outline Drawing

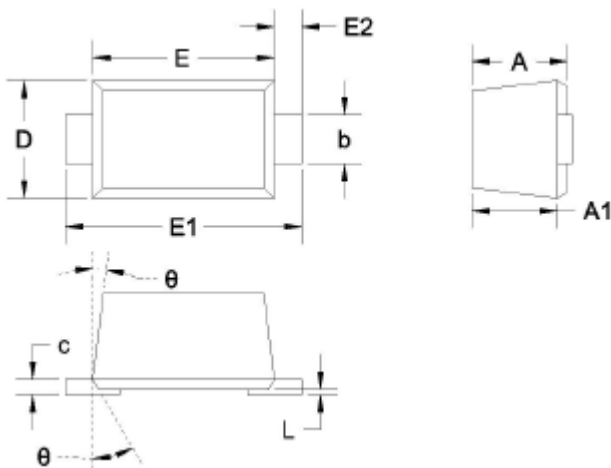

Units in millimeters

Unit	A	A1	b	c	D	E	E1	E2	L	θ
MAX.	0.77	0.70	0.35	0.15	0.85	1.30	1.70	0.20	0.07	7°
MIN.	0.51	0.50	0.25	0.08	0.75	1.10	1.50	REF.	0.01	REF.

### Recommended Land Pattern

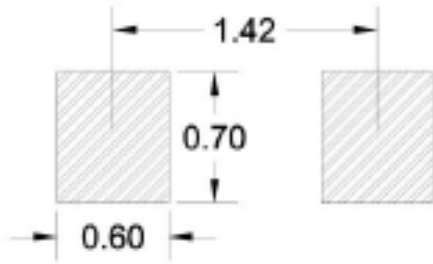

Note:

1. Controlling dimension: in millimeters
2. General tolerance:  $\pm 0.05\text{mm}$
3. The pad layout is for reference only

### Revision history of Specification

Version	Change Items	Effective Date
1.0	Initial Release	13-July-2021